

# SCREW-IN SENSOR




**KNA:** thermocouple type

*Description:*

Single and double thermocouple with connection head and metal thermowell. Thread mounting: M33x2. Design: with neck. Especially for temperature measuring of pressurized agents. Material of neck: KO33.

*Temperature:* „J” 0...+500°C, „K” 0...+800°C

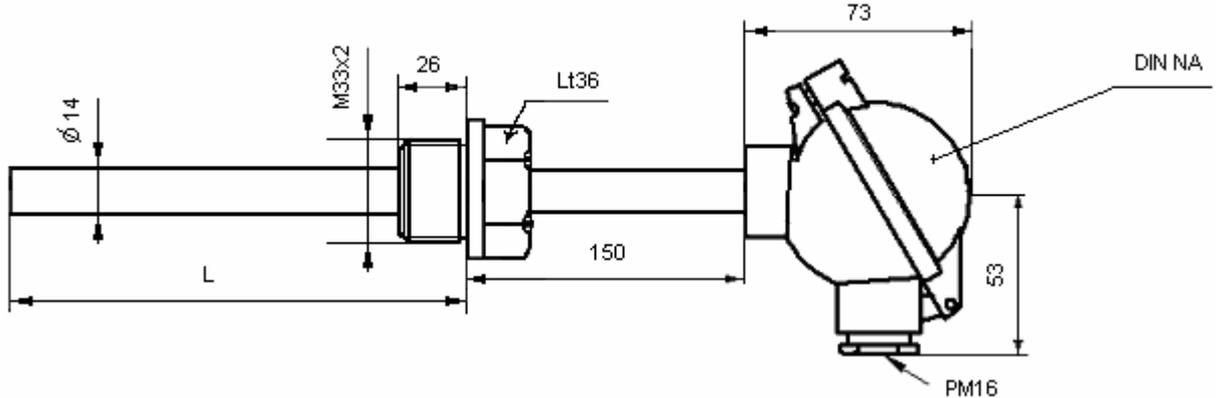

**Ordering code:**

K	N	A			1														
---	---	---	--	--	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--

**MEASURING-ELEMENT:**

Type of thermocouple:  
 „J” Fe-CuNi (IEC584)  
 „K” NiCr-Ni (IEC584)  
 Other

Class of accuracy: I.  
 II.

Diameter of thermocouple [mm]: 1

Construction: Simple  
 Double  
 Triple

1  
2  
9

1  
2

1

2  
3  
4

**THERMOWELL, CONNECTION:**

Material of thermowell: 1.4301  
 1.4541  
 Other

Diameter of thermowell [mm]: 14  
 Other

Length of thermowell [mm]:

Head: Non adjustable  
 Adjustable

1  
2  
9

1 4  
9 9

0  
1

**ACCESSORIES ON REQUEST:**

Head mounted transmitter (4-20 mA):  
 Not order  
 Order

0  
1

**Naturally, we can differ from the above construction.**

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135, e-mail: [ugyfelsz@rhodium.hu](mailto:ugyfelsz@rhodium.hu), We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.